


SH A

High-Capacity Rubber Roll Sheller

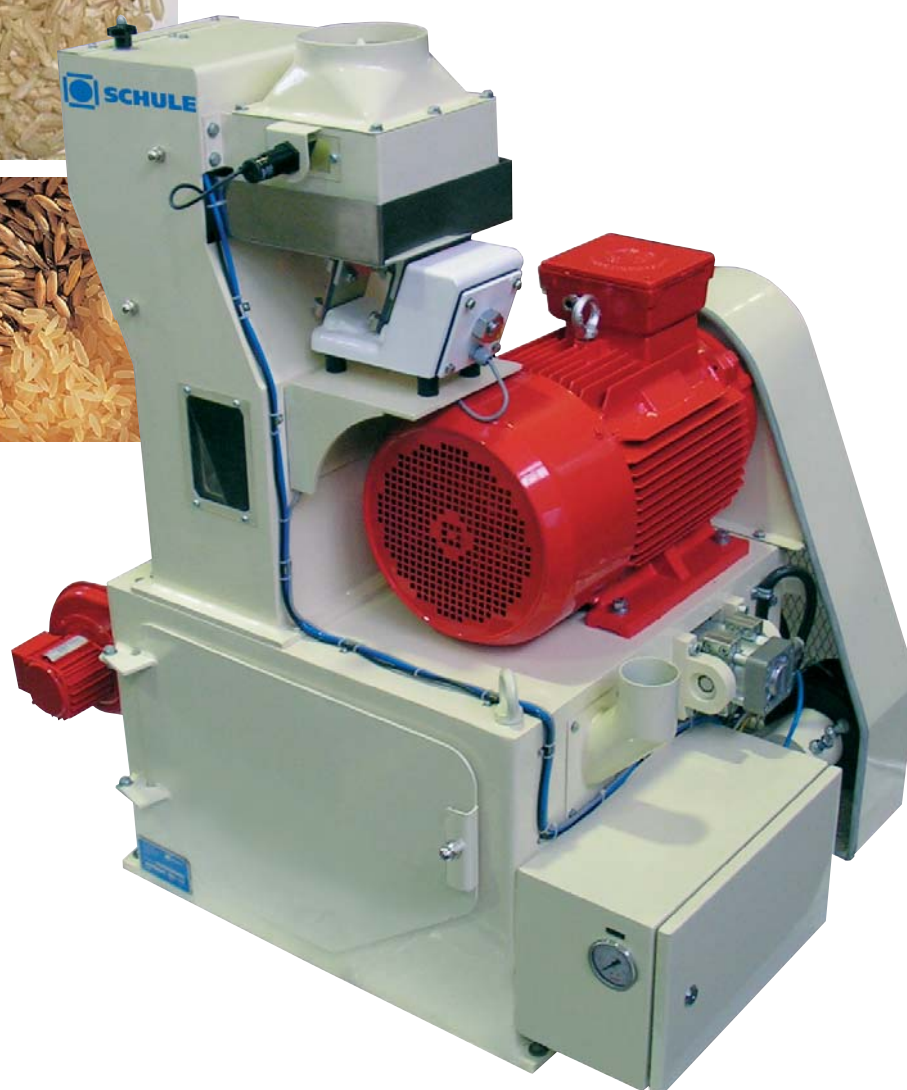

SH A

High-Capacity Rubber Roll Sheller

During entering the machine the paddy passes a photo cell.


The photo cell is activating the following vibratory feeder as well as the given pressure to the rubber rolls. The paddy enters via a new designed chute between the rubber rolls which are mounted diagonal.

A fan for intensive cooling of the rubber rolls ensures extreme roll life and this helps to achieve lowest operation costs.

The sheller should preferably be connected to an aspiration system.

The mixture of shelled rice, paddy and husk leaves the rubber roll sheller through the outlet.

Usually, the sheller is combined with the closed circuit husk separator HUS 1260.

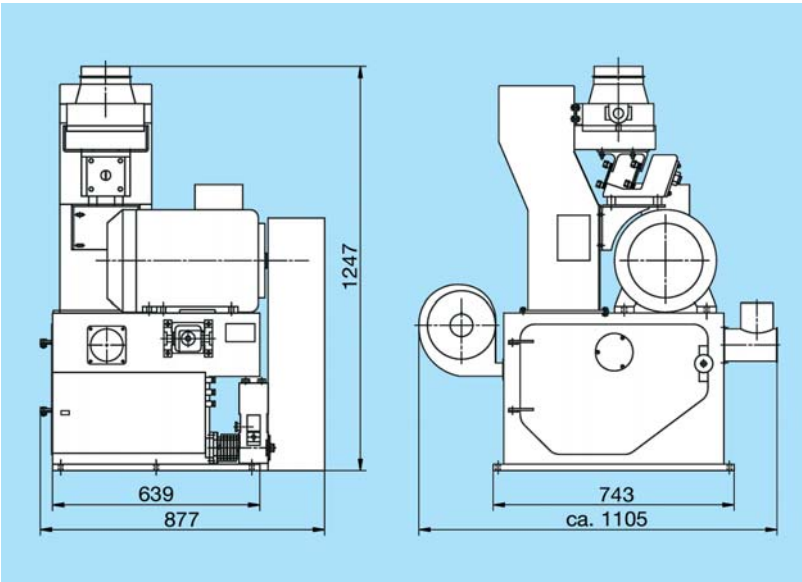

Dimensions of the High-Capacity Rubber Roll Sheller SH A

Technical Data SH A

Capacity per hour*	Rubber Roll Diam.	Length	Motor Power Sheller	Motor Power Blower	Air required Aspiration	Compressor 7 Bar
Kilos	mm	mm	kW	kW	m³/min	ltr./min
Up to 6 000	254	254	11.0	0.03	8	–

Shipping Data

Net weight	Gross weight	Cubage
Kilos	Kilos	m³
~700	~850	1.2

* Depending on product